

# EE871

## Digital CO<sub>2</sub> Probe for Demanding Applications

The E+E CO<sub>2</sub> probe EE871 is designed for use in harsh, demanding OEM applications. A multiple point CO<sub>2</sub> and temperature adjustment procedure leads to excellent CO<sub>2</sub> measurement accuracy over the entire temperature working range, ideal for use in agriculture or outdoors. EE871 incorporates the dual wavelength NDIR CO<sub>2</sub> sensor, which automatically compensates for ageing effects and is highly insensitive to pollution.

The IP65 enclosure and the replaceable filter offer excellent protection in harsh, polluted environment. With a special filter cap, the EE871 can be employed in applications with periodical H<sub>2</sub>O<sub>2</sub> sterilization. The compact size, the M12 connector and the optional mounting flange allow for fast probe installation or replacement. With the optional radiation shield, EE871 can be also used outdoors.



EE871

The measured data range of up to 5 % CO<sub>2</sub> (50,000 ppm) is available on E2 digital interface and up to 1 % CO<sub>2</sub> (10,000 ppm) is available on Modbus RTU interface.

An optional kit facilitates easy configuration and adjustment of EE871. The measurement interval can be set according to the application requirements, by this the average current consumption can be reduced to 120 µA for battery-operated devices.

### Typical Applications

Greenhouses and livestock barns  
 Fruit and vegetable storage  
 Hatchers and incubators  
 Outdoor CO<sub>2</sub> monitoring  
 Data loggers and handhelds  
 Pharma, Biotech (H<sub>2</sub>O<sub>2</sub> sterilization)

### Key Features

Auto-calibration  
 Outstanding long-term stability  
 Temperature compensation  
 Very low current consumption  
 IP65 enclosure  
 Modbus RTU or E2 interface

### Technical Data

#### Measured values

##### CO<sub>2</sub>

Measuring principle	Dual wavelength (non-dispersive infrared technology) NDIR
Measurement range	0...2000 ppm: < ± (50 ppm + 2 % from the measured value)
Accuracy at 25 °C and 1013 mbar <sup>1)</sup> (77 °F...14,69 psi)	0...5000 ppm: < ± (50 ppm + 3 % from the measured value)
	0...10,000 ppm: < ± (100 ppm + 5 % from the measured value)
	0...3 %: < ± (1,5 % from full scale + 2 % from the measured value)
	0...5 %: < ± (1,5 % from full scale + 2 % from the measured value)
Response time t <sub>63</sub>	105 s with measured data averaging (smooth output) 60 s without measured data averaging
Temperature dependency (-20...45 °C) (-4...113 °F)	0...2000 ppm: typ. ± (1 + CO <sub>2</sub> concentration [ppm] / 1000) ppm/°C
	0...10,000 ppm: typ. -0,3 % from the measured value/°C
Measurement interval	adjustable from 15 s to 1 h (Factory setting: 15 s)

#### General

Digital interface	Modbus RTU or E2 (details: <a href="http://www.epluse.com">www.epluse.com</a> )
Supply voltage	4.75 - 7.5 VDC

1) For averaging output


Average current consumption <sup>2)</sup>	120 µA (at 1 h measurement interval)...4.3 mA (at 15 sec. measurement interval)
Current peak	max. 350 mA for 0.05 s
Housing / Protection class	Plastic PC / Housing IP65
Electrical connection	Connector M12 x 1
Cable length E2 interface	max. 10 m (32.8 ft)
Electromagnetic compatibility (Industrial environment)	EN61326-1 EN61326-2-3
Operating conditions	-40...60 °C (-40...140 °F) 0...100 % RH (non-condensing) 85...110 kPa (12,33...15,95 psi)
Storage conditions	-40...60 °C (-40...140 °F) 0...100 % RH (non-condensing) 70...110 kPa (10,15...15,95 psi)



2) The average current consumption depends on the measurement interval

## Connection

## Dimensions (mm/inch)

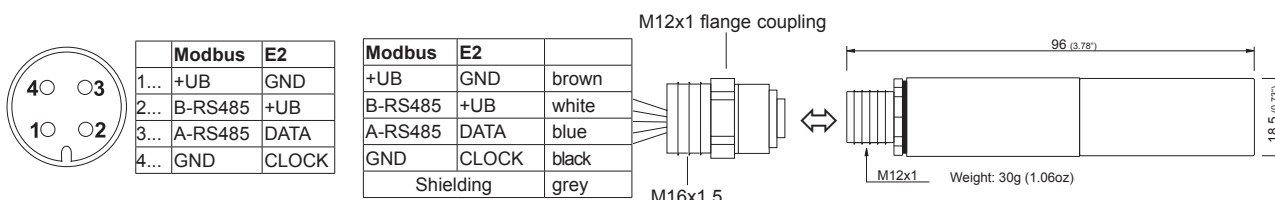

## Modbus Map

The measured values are saved as a 32Bit *float* value from 0x2D to 0x30. The factory setting for the Slave-ID is 246 as an *integer* 16Bit value. This ID can be customised in the register 0x00 (permitted values 1 - 247).

### FLOAT (read register):

Coil / Register Numbers	Data-Addresses	Parameter name
30046	0x2D	CO <sub>2</sub> Response time = 60s
30048	0x2F	CO <sub>2</sub> Response time = 105s


### INTEGER (write register):

Coil / Register Numbers	Data-Addresses	Parameter name
60001	0x00	Slave-ID
60002	0x01	RS485 Setting
60003	0x02	Measuring time interval

For Modbus protocol setting please see Application Note ([www.epluse.com/EE871](http://www.epluse.com/EE871)).

## Operation outdoors

For outdoor applications EE871 must be used with the radiation shield order no. HA010507, which protects the device against rain, snow, ice, and solar radiation.

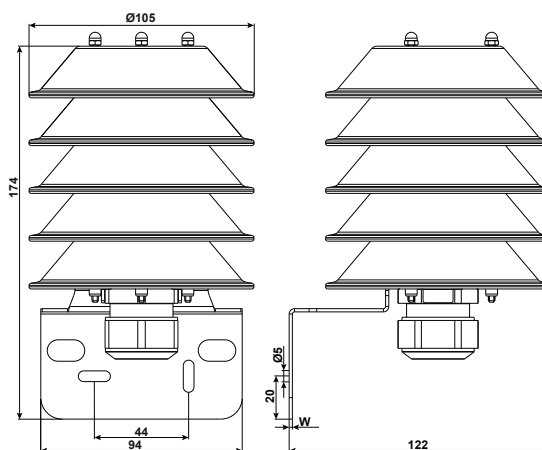

## Scope of Supply

- EE871 probe according to ordering guide
- Test report according to DIN EN10204 - 2.2

## Ordering Guide

		EE871
CO <sub>2</sub> Range	0...2000 ppm	HR2000
	0...5000 ppm	HR5000
	0...10,000 ppm	HR1
	0...3 % (only with E2 Interface)	HR3
	0...5 % (only with E2 Interface)	HR5
Digital Output	E2 Interface	J2
	Modbus RTU	no code
Filter cap	PTFE	no code
	H <sub>2</sub> O <sub>2</sub>	F12
Baudrate <sup>1)</sup>	9600	no code
	19200	BD6
	38400	BD7
Parity <sup>1)</sup>	no parity	PY0
	odd	no code
	even	PY2
Stopbits <sup>1)</sup>	1 stopbit	no code
	2 stopbits <sup>2)</sup>	BT2

1) Only for Modbus RTU

2) Only in combination with „no parity“

## Ordering Example

### EE871-HR5J2

CO<sub>2</sub> range: 0...5 %  
 Digital Output: E2 Interface  
 Filter cap: PTFE

### EE871-HR2000F12PY2BT2

CO<sub>2</sub> range: 0...2000 ppm  
 Digital Output: Modbus RTU  
 Filter cap: H<sub>2</sub>O<sub>2</sub>  
 Baudrate: 9600  
 Parity: even  
 Stopbits: 2

## Accessories (For further information, see data sheet "Accessories")

Mounting flange	HA010212
M12x1 flanged coupling with 50mm (1.97") stranded wire	HA010705
Modbus configuration adapter	HA011012
E2 Test and configuration adapter	HA011010
E+E Product configuration software (Download: <a href="http://www.epluse.com/Configurator">www.epluse.com/Configurator</a> )	EE-PCS
Connecting cable M12 - flying leads (1.5 m (59.06") / 5 m (196.85") / 10 m (393.70"))	HA010819/20/21
T-Coupler M12 - M12	HA030204
M12 Connector for self assembly	HA010707
PTFE filter cap	HA010116
H <sub>2</sub> O <sub>2</sub> filter cap	HA010122
Radiation shield	HA010507
Protection cap for the M12 cable socket	HA010781
Protection cap for the M12 plug of EE871	HA010782

## Support Literature

[www.epluse.com/EE871](http://www.epluse.com/EE871)