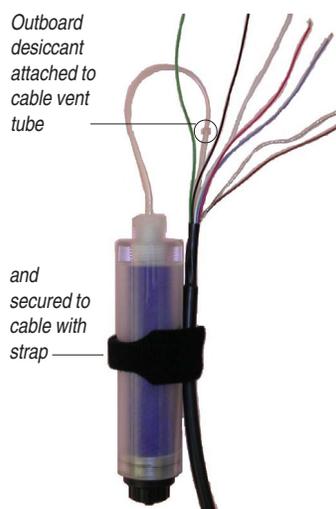
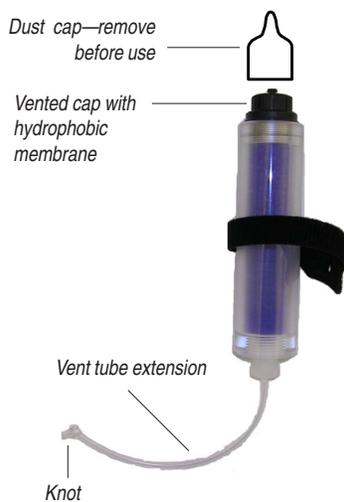


Information SheetCatalog No. **0051380**

OUTBOARD DESICCANT PACK

**DESCRIPTION**

A clear acrylic tube with replaceable indicating desiccant, designed to attach to the vent tube of vented RuggedCable™ stripped and tinned. Protects the device's cable and electronics from condensation of water vapor in high-humidity environments. The desiccant gradually turns from blue to pink as it becomes saturated with moisture.

Material	Clear acrylic, nylon, HDPE membrane (high density polyethylene)
Environmental rating	Weatherproof, not designed for submersion
Size	3.2 cm (1.25 in) O.D., 11.4 cm (4.5 in) long
Desiccant	approx. 22 g silica gel, type 4

INSTALLATION

1. Snip off the knot at the bottom of the vent tube extension.
2. Attach the vent tube extension firmly to the cable vent tube. Cover at least a quarter-inch of the cable vent tube for a secure attachment.
3. Use the attached hook-and-loop strap to secure the desiccant to the cable, below the stripped wires, as shown in the lower photo at left.
4. Remove the red dust cap from the desiccant pack to allow air to reach the cable's vent tube.

GUIDELINES & PRECAUTIONS

- Desiccant will absorb moisture from the top down and for best results should be replaced before the entire volume has turned pink. Desiccant refill kits, Cat. No. 0029140, are available from In-Situ Inc. or your distributor.
- Protect new desiccant from moisture until ready to use. The supplied dust cap and the knot in the vent tube help to keep the desiccant dry.
- Be sure to remove the dust cap before deployment to allow air to reach the cable's vent tube.

1 800 446 7488(toll-free, US and Canada) or 970 498 1500 **www.in-situ.com**

Due to continuing product development this information is subject to change without notice. In-Situ and the In-Situ logo, Win-Situ, TROLL, BaroTROLL, RuggedReader, RuggedCable, and RDO are trademarks or registered trademarks of In-Situ Inc. Copyright © 2006 by In-Situ Inc. All rights reserved.

0051382 rev. 002 10/06