

### Key Features

- Precision 3-Axis Sonic Anemometer
- Horizontal Head for Minimal Flow Disturbance
- 0-45m/s wind speed
- 0-359° wind direction
- Stainless Steel Construction
- 100Hz Output Rate
- U, V, W Vector Outputs

The HS-100 3-axis anemometer features a horizontal head design, which allows for accurate measurement of vertical flows with minimum flow interruption from the anemometer geometry.

Ideal for scientific research applications, HS-100 is capable of monitoring wind speeds of 0-45m/s and offers a fast update rate of 100Hz for precision wind analysis.

The head of the anemometer features a built-in inclinometer to allow the instrument to be accurately positioned on a tower or mast. Access to the PRT and analogue inputs is provided via a separate electronic enclosure. The instrument is ideal for analysis of surface turbulence and can be positioned close to the ground or crop and tree canopies.



#### WIND SPEED

Range	0 - 45 m/s
Accuracy	<1% RMS
Resolution	0.01 m/s

#### DIRECTION

Range	0 - 359°
Accuracy*	<±1° RMS
Resolution	1°

#### ULTRASONIC MEASUREMENT

Ultrasonic sampling rate	100 Hz
Parameters	U, V, W, Speed of Sound

#### SPEED OF SOUND

Range and resolution	300 - 370m/s, 0.01/s
Accuracy	<±0.5% @20°C

#### DIGITAL OUTPUT

Communication	RS422 full duplex, 8 data bits, 1 stop bit, no parity
Baud rates	2400 - 115200
Output rate	Selectable 0.4 - 100 Hz

#### ANALOGUE INPUTS

Quantity	6 differential inputs
Sampling rate	100 Hz
Input range/resolution	±5V, 14 bits
Accuracy	<0.1% of FSR

\*Accuracy specification applies for wind speed <32m/s and for wind incidence < ±50° in the horizontal plane and up to ±50° from the horizontal

#### ANALOGUE OUTPUTS (VIA SUPPLIED PCIA)

Quantity	7 (U, V, W, SoS, PRT+2 analogue outputs)
Scale	±10, ±20, ±30, ±60m/s
Update rate	0.4 to 100 Hz
Range and resolution	±2.5V, 14 bits
Accuracy	<0.25% of FSR

#### PRT INPUT (PRT100 NOT INCLUDED)

Input resolution	0.01°C
Input accuracy	<0.01°C (from 0°C to +50°C) <0.15°C (from -40°C to +60°C)

#### INCLINOMETER

Range/resolution	±20°, 0.01°
Null repeatability	±0.15°
Accuracy	±0.3° (from -10° to +10° of inclination)

#### POWER REQUIREMENT


Anemometer	9-30VDC (<150mA @ 24VDC or 300mA @ 12VDC)
------------	-------------------------------------------

#### ENVIRONMENTAL

Operating temperature	-40°C to +60°C
Protection class	IP65
Precipitation	300mm/hr
EMC	EN 50081-1: 1992 (Emissions) EN 50082-1: 1992 (Immunity)
Suitable for exposure to a marine environment.	

### Typical Applications

- Wind Turbulence Measurement
- Component Wind Velocity UVW
- Wind Profiling
- Remote Research facilities
- Off-shore installations
- Test Sites

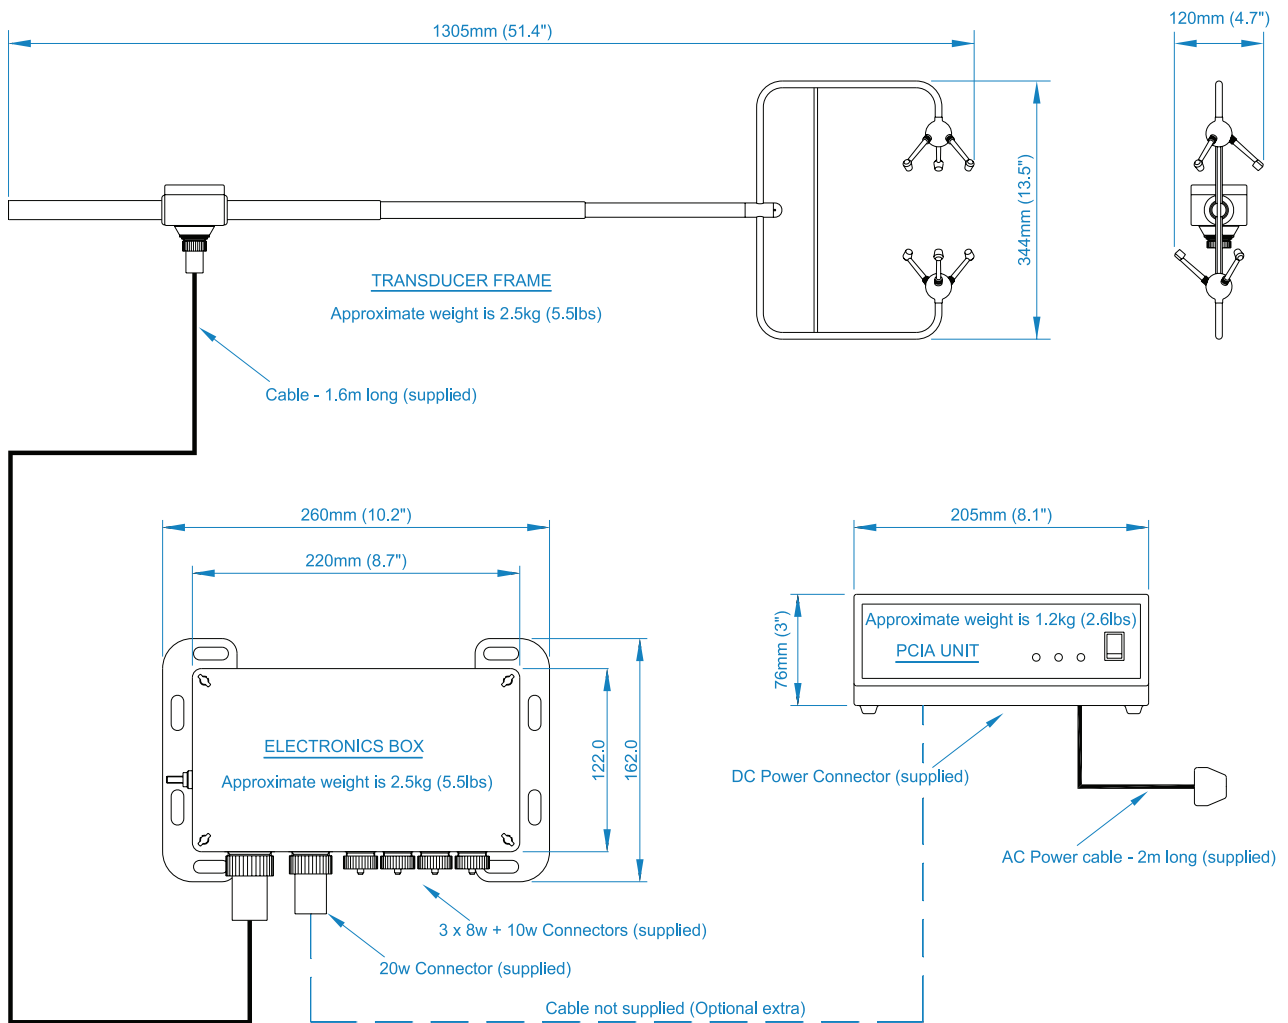

Specifications may be subject to change without prior notice.



#### Gill Instruments Limited

Saltmarsh Park, 67 Gosport Street  
Lymington, Hampshire SO41 9EG  
United Kingdom

Tel: +44 (0) 1590 613 500  
Fax: +44 (0) 1590 613 501  
anem@gillinstruments.com



[www.gillinstruments.com](http://www.gillinstruments.com)

1199-0034 - Iss 1

Copyright © Gill Instruments 2013

Gill Instruments Ltd, Reg No. 2281574  
Registered Office: The George Business Centre, Christchurch Road, New Milton, BH25 6QJ